

ArmD[®] Metal-Coated Silica Fibers

Silica/silica fibers with Metal Coating

ArmD[®] Metal-coated silica fibers, available in Tin, Copper, Aluminum, and Carbon-primed Aluminum are capable of withstanding the highest temperatures among all types of fibers, making them well-suited for challenging environments.

Wavelength		Numerical Aperture (NA)	
ArmD [®] UV	190 - 1200 nm	Low	0,12 ± 0,02 0,15 ± 0,02
ArmD [®] NIR	300 - 2400 nm	Standard	0,22 ± 0,02
		High	0,26 ± 0,02 0,28 ± 0,02

Advantages

- Available for all fibers
- Exceptional resistance to high temperatures
- Robust resistance to harsh chemicals
- Solderable for convenient integration
- Hermetically sealed for enhanced durability


Metal Coating Options:

Tin: 230°C
 Copper (Cu): -270 to + 600°C*
 Aluminum(Al): -270 to + 400°C

*Temperature of up to 750°C can be achieved if a Cu + Ni double layer is applied

Fluorine-doped silica cladding

Silica glass core

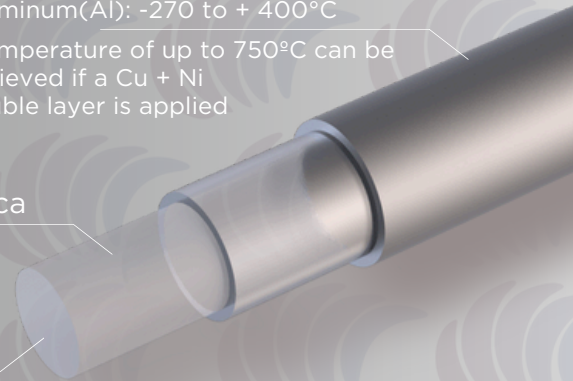

Technical data

Operating temperature	- 270 to + 600 °C
Core diameter	Available from 25 to 2000 μm
Core thickness	Tin: 15 to 50 Copper: 15 to 50 Aluminum: 15 to 150
Tensile strength (short gauge), GPa	Tin: 6 to 9 Copper: 2 to 3 Aluminum: 3.5 to 6
Two point bending strength, GPa	Tin: > 10 Copper: > 10 Aluminum: > 10
Static fatigue parameter, n	Tin: > 100 Copper: > 100 Aluminum: > 100
Minimum bending radius	100 × diameter (short-term mechanical stress) 200 × diameter (during use with high laser power)



armadillosia.com
 +1-408-900-8883
 info@armadillosia.com



Scan to see more